


Mutina

Tally outdoor by Michael Anastassiades



EN


General information
Laying and maintenance tips
Colors
Technical features
Packing

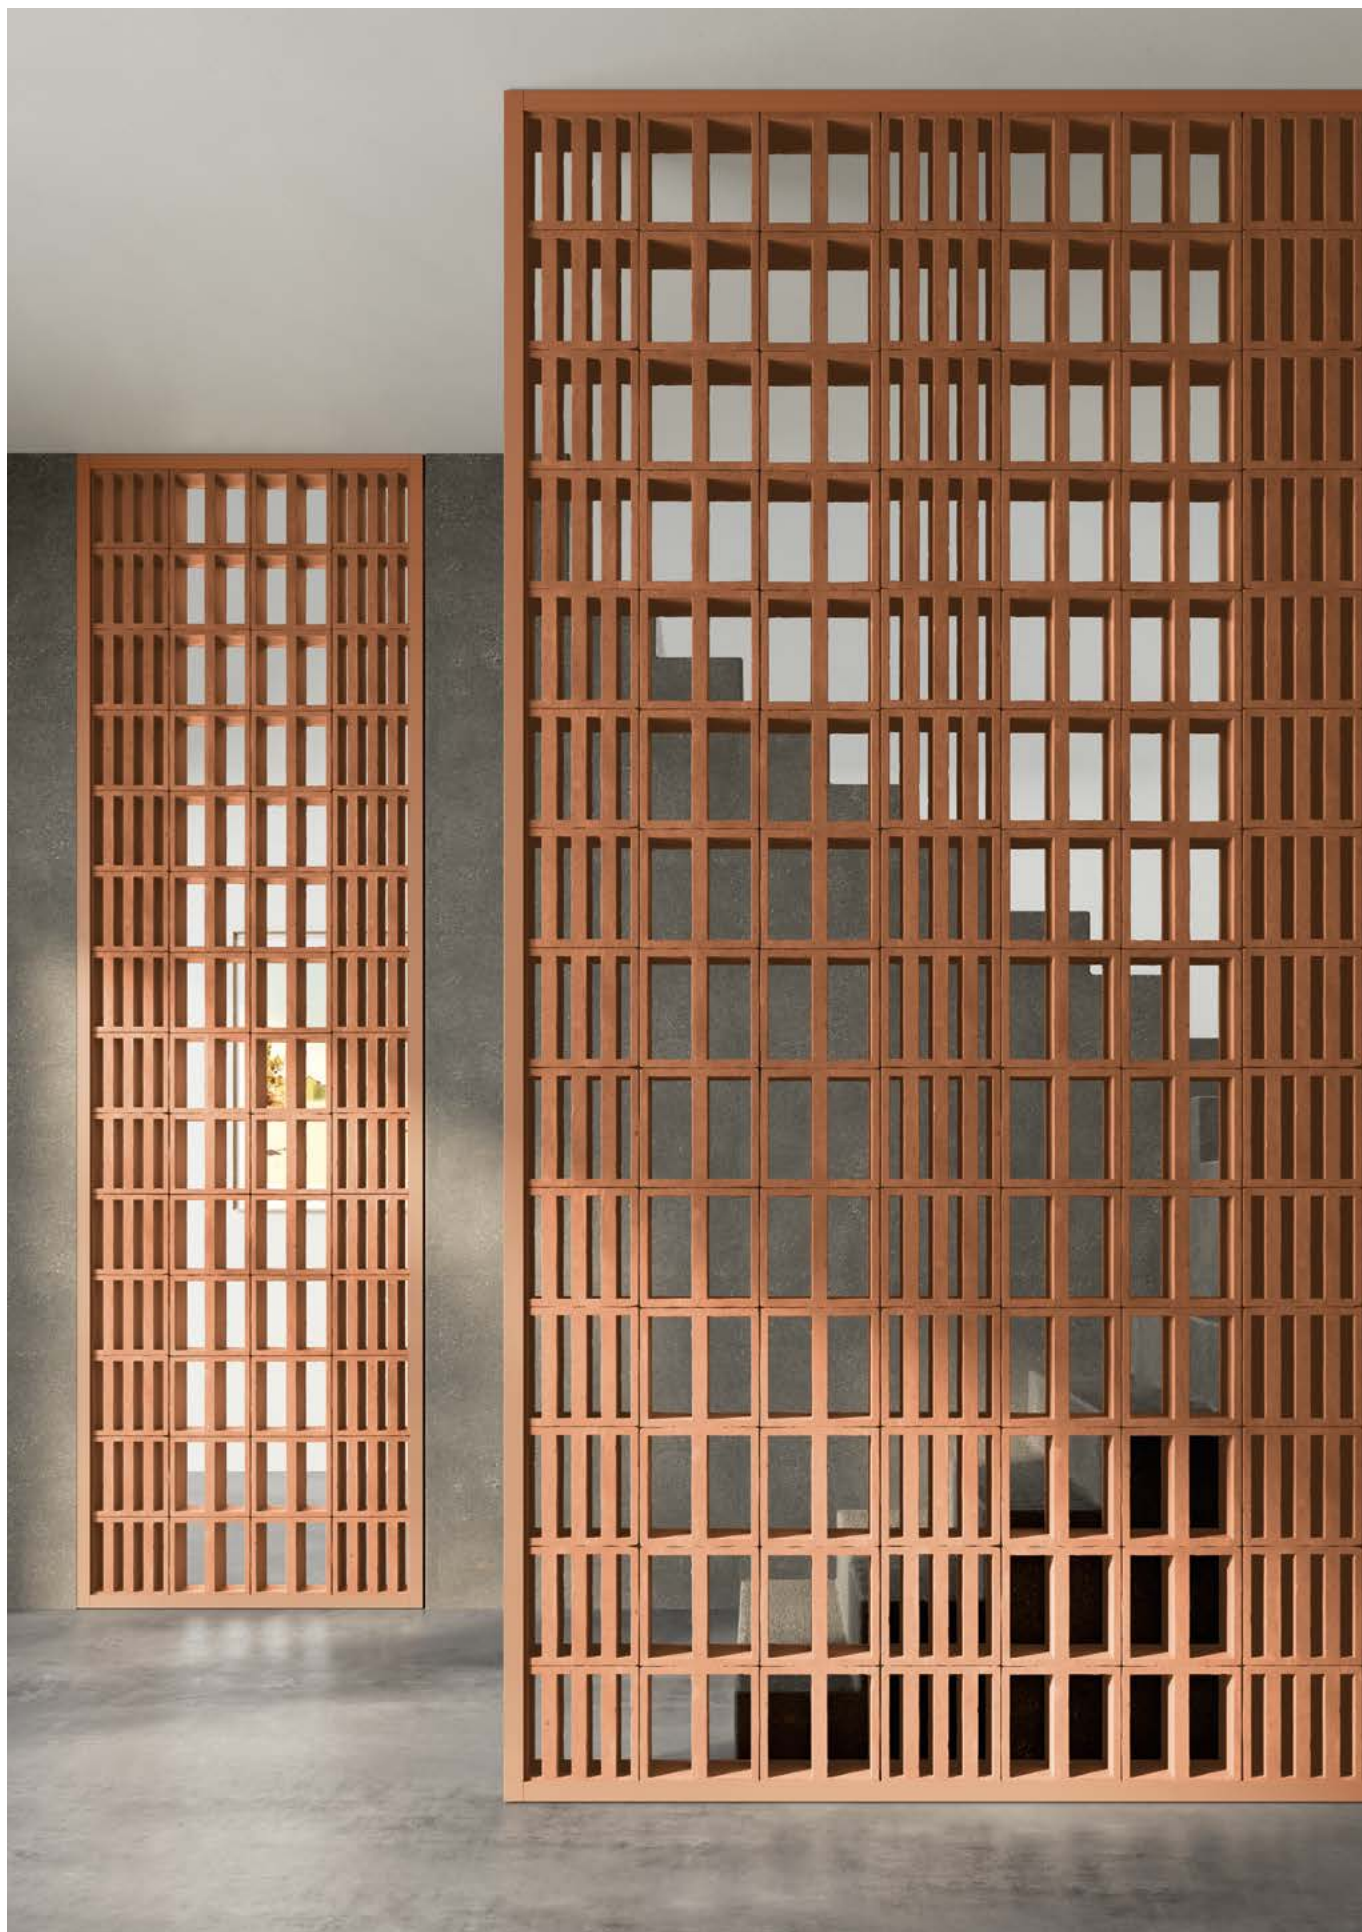



Informazioni generali

The data, information and indications contained in this technical data sheet and in further documents relating to the Tally outdoor by Michael Anastassiades product are the exclusive property by Ceramiche MUTINA S.p.a. This Technical Data Sheet provides the buyer with information relating to the use of the product useful for its correct installation and evaluation and prevention of risks arising from the normal use of the same.

collection	Tally outdoor
design	Michael Anastassiades, 2025
production	Artisanal
material	Extruded terracotta
thickness	10 cm
nominal sizes	24x24x10 cm
specification	<p>artisanal extruded partition elements, 10cm thick. 2 models 1 colours: Natural (natural finishing)</p> <p>This product is suitable for both residential and commercial areas, to be installed in walls with height of 4mt. These elements must in any case comply with the technical standards of construction regulation, applicable in the country where they are installed. For the Italian national territory, in particular, they should comply with standard NTC 2018 DECRETO MIN 27/01.</p> <p>In order to achieve an optimal aesthetic outcome we advise to install TALLY OUTDOOR using our wooden profile. A top profile with removable sides is provided for ceiling fixing.</p> <p>As complementary pieces Mutina provide the Mutina adhesive, EC 1 plus for VOC emissions.</p>
award	Hospitality Design Awards Las Vegas in the Category Custom Art + Installations.
category	UNI 11128/2004

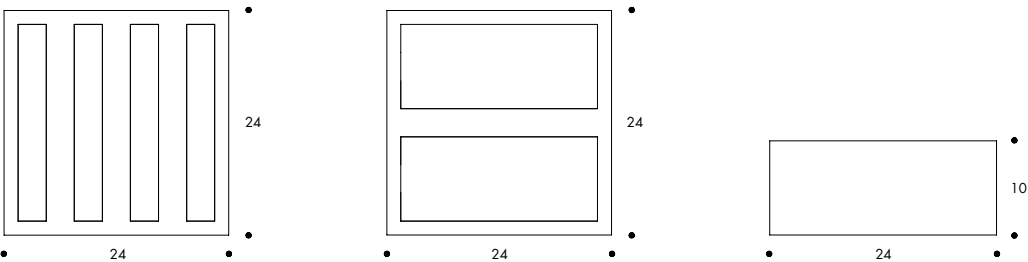


complementary pieces

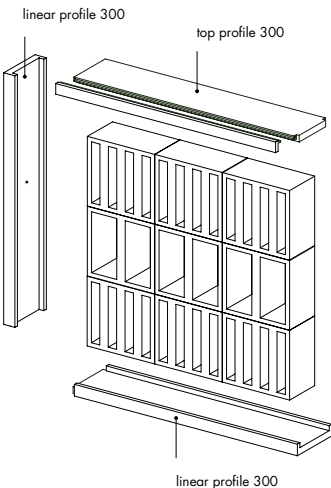


colour




Argilla




laying scheme 1




laying scheme 2




laying scheme 3



laying scheme 4




laying scheme 5




laying scheme 6


ANCHORING ON 2 SIDES
MAX h400 cm



ANCHORING ON 3 SIDES
MAX h400x300 cm



ANCHORING ON 2 SIDES
MAX h250x100 cm



Laying and maintenance tips

use	Tally outdoor is suitable for outdoor areas complying with UNI EN 772-22 marked "F2- extreme exposure".
installation	–
recommended adhesive	Mutina adhesive: solvents-free, eco-friendly organic adhesive.
recommended joints	–
recommended fillers	–
cleaning at the end of installation	Avoid drippings during installation. If needed the excess can be removed after the product has dried, using a tool with a sharp edge.
general cleaning (installed tiles)	–
calibers (real size)	24 x 24 x 10 cm with 3 mm tolerance (artisanal product)

Colours



Tally Wide



Tally Narrow

Technical features

STANDARD	FEATURES	VALUE REQUIRED	TALLY OUTDOOR
UNI EN 772-16	dimensions	to declare	T2-R2
UNI EN 772-21	water absorption	to declare	12,5%
UNI EN 772-5	soluble salts content	to declare	S2
UNI EN 772-22	freeze-thaw resistance	to declare	F2
D.M. 1401/2008	determination of variable horizontal loads	to declare	C2
Leed 4.1			10%
VOC Emission			available upon request
Declaration of Contents			available upon request
SDS			available upon request
BPD3			available upon request
HPD			available upon request

Packing

SIZE	PCS-SQM	SQM-PAL	PCS-PAL	KG-PC	KG-PAL
Tally Narrow	17,36	1,84	32	6,50	208
Tally Wide	17,36	1,84	32	3,80	121,60